


C-Links



MARC (Modified AnchoR Connecting Link – MARC)

Type Approved by DNV-GL

Offshore accessory to be used for Temporary Mooring as defined in DNVGL-OS-E301, Position Mooring

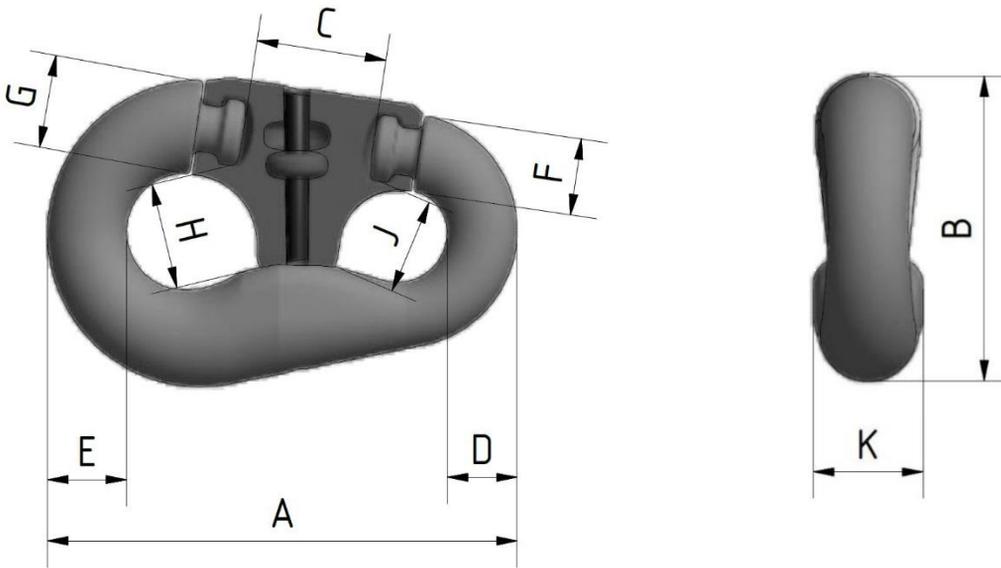

No.	chain dia.	A	B	C	D	E	F	G	H	J	K	R4 PL kN	R4 MBL kN
7	62-79	565	373	156	83	93	91	112	123	105	127	5079	6443
8	81-92	652	429	161	95	125	118	130	149	125	145	6699	8497



Type approved by:

DNV-GL

Application:

Temporary Mooring

Manufactured & Tested: in Germany by Feubo

Material:

Forged Steel - Grade R4

Features:

Used to connect chain in Temporary Mooring
as defined in Offshore Standard DNV-GL-OS-E301